

FIG. 1

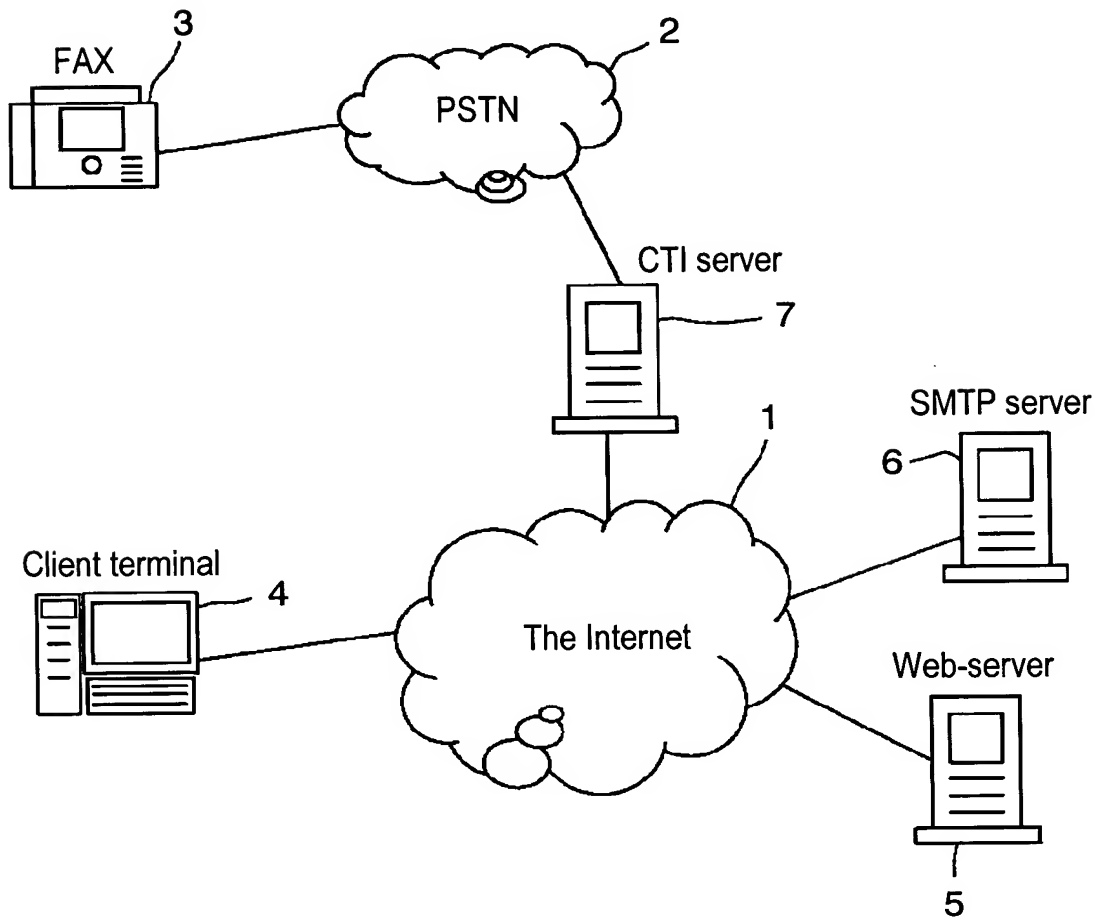


FIG. 2

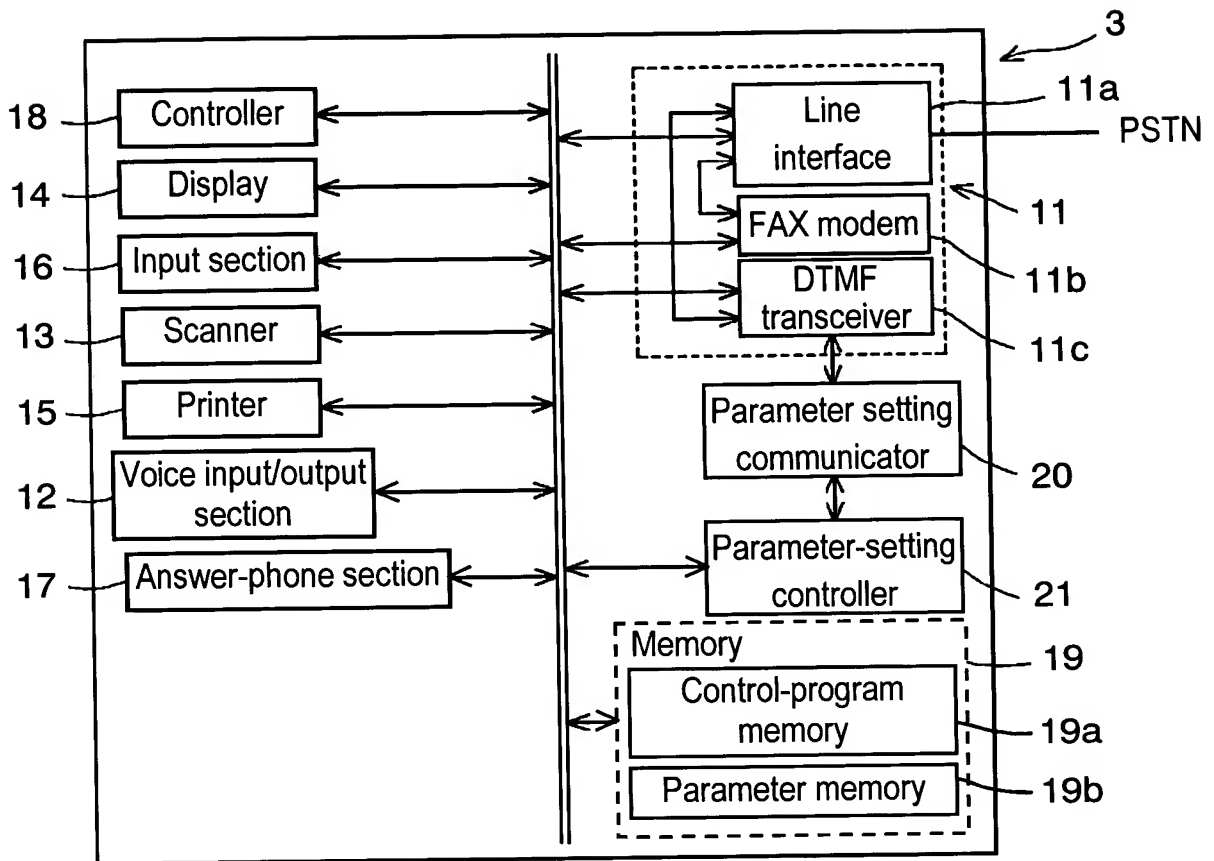


FIG. 3

Structure of web-server

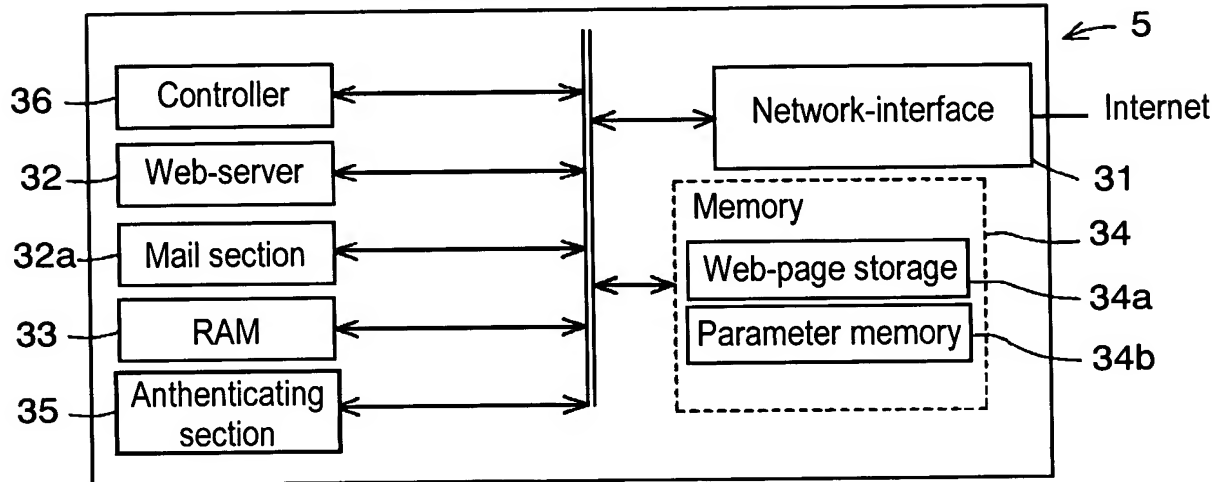


FIG. 4

Structure of CTI server

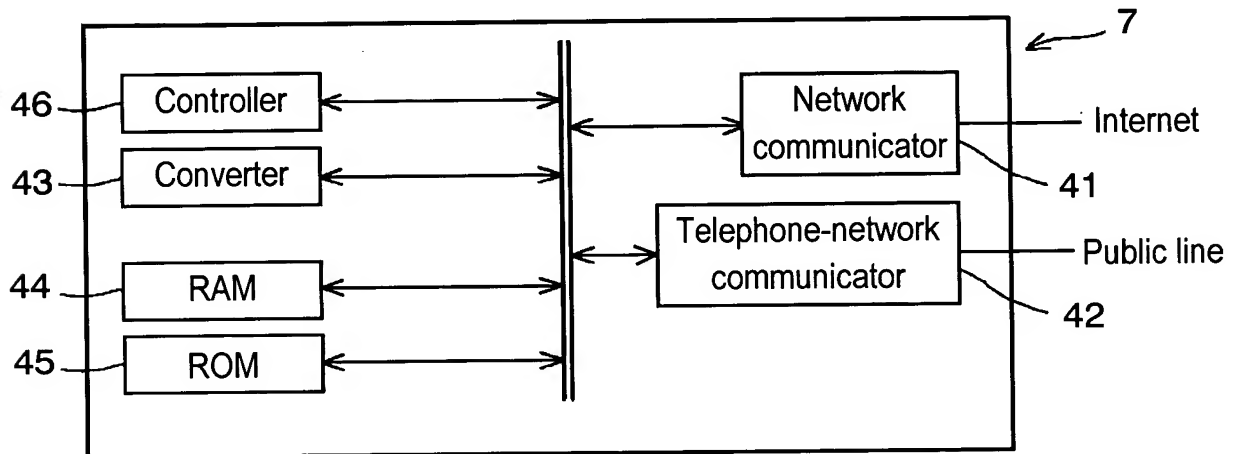


FIG. 5

control command between CTI server and facsimile machine

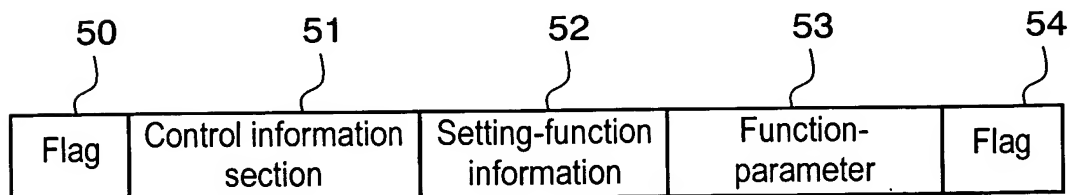


FIG. 6

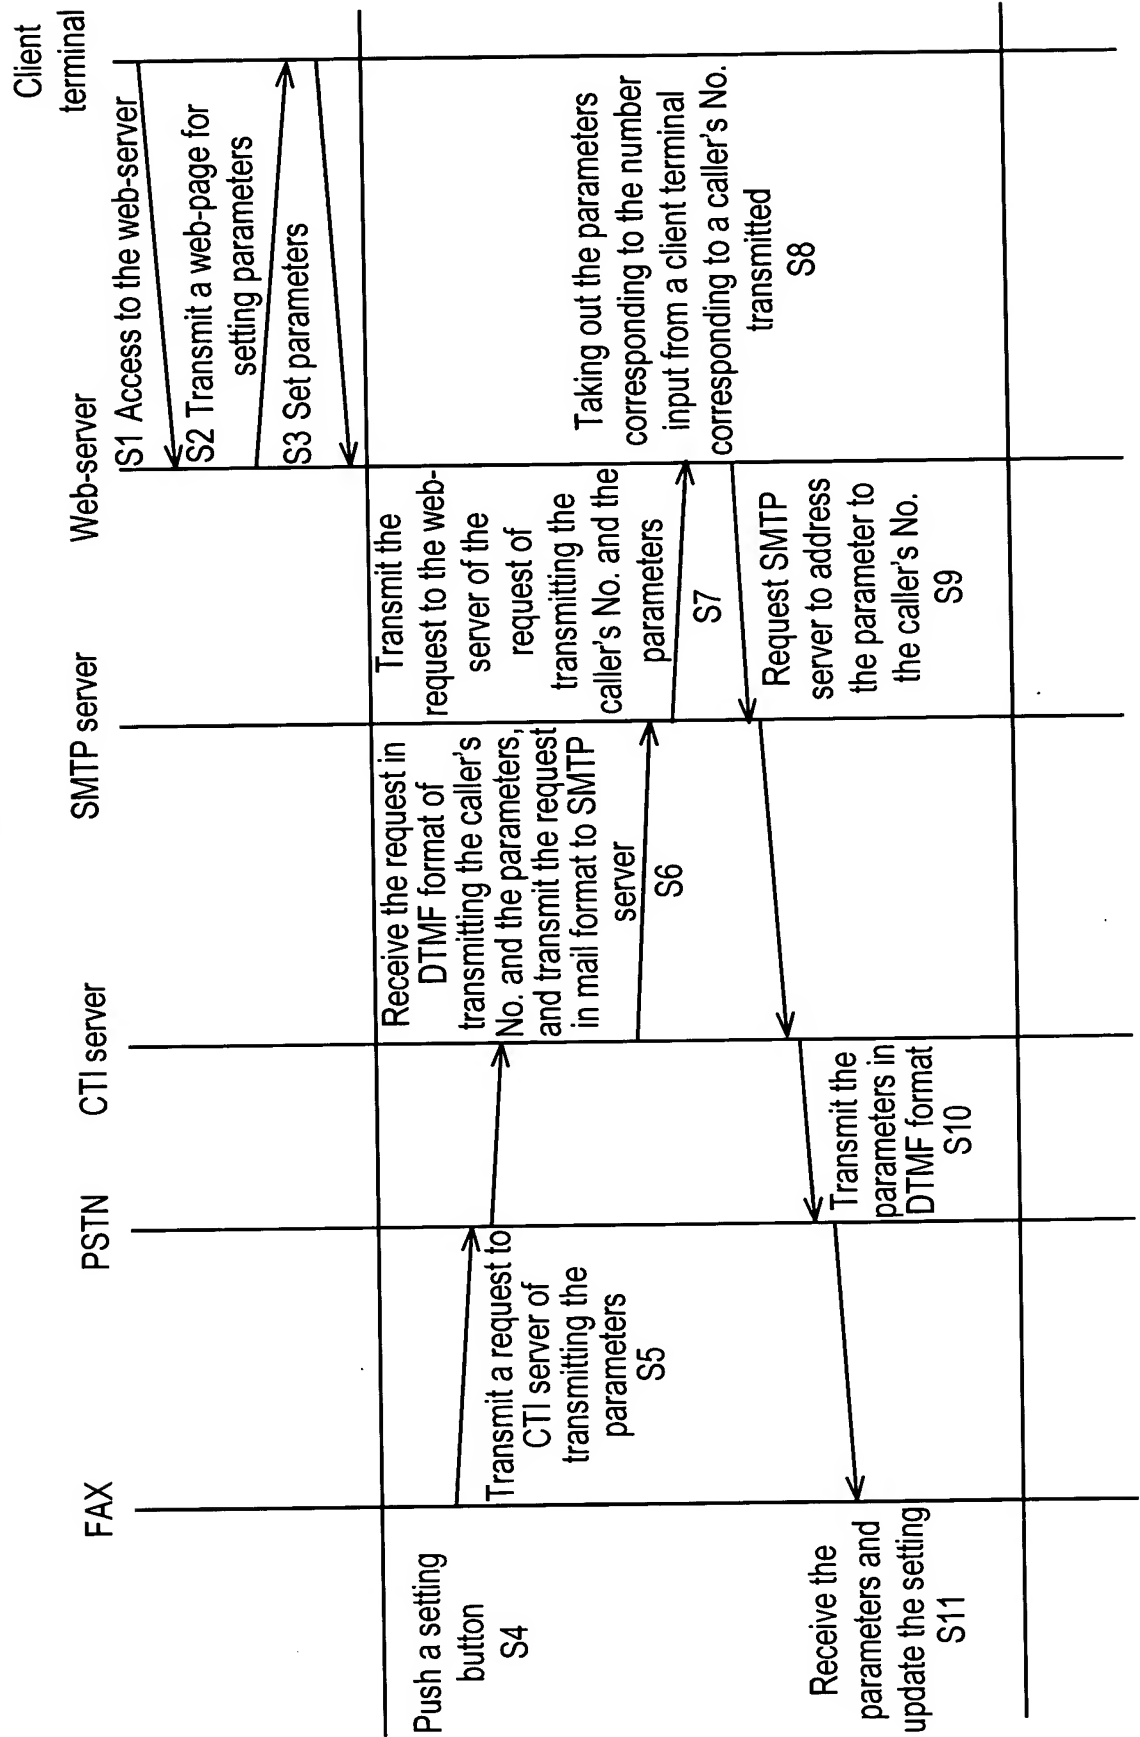


FIG. 7

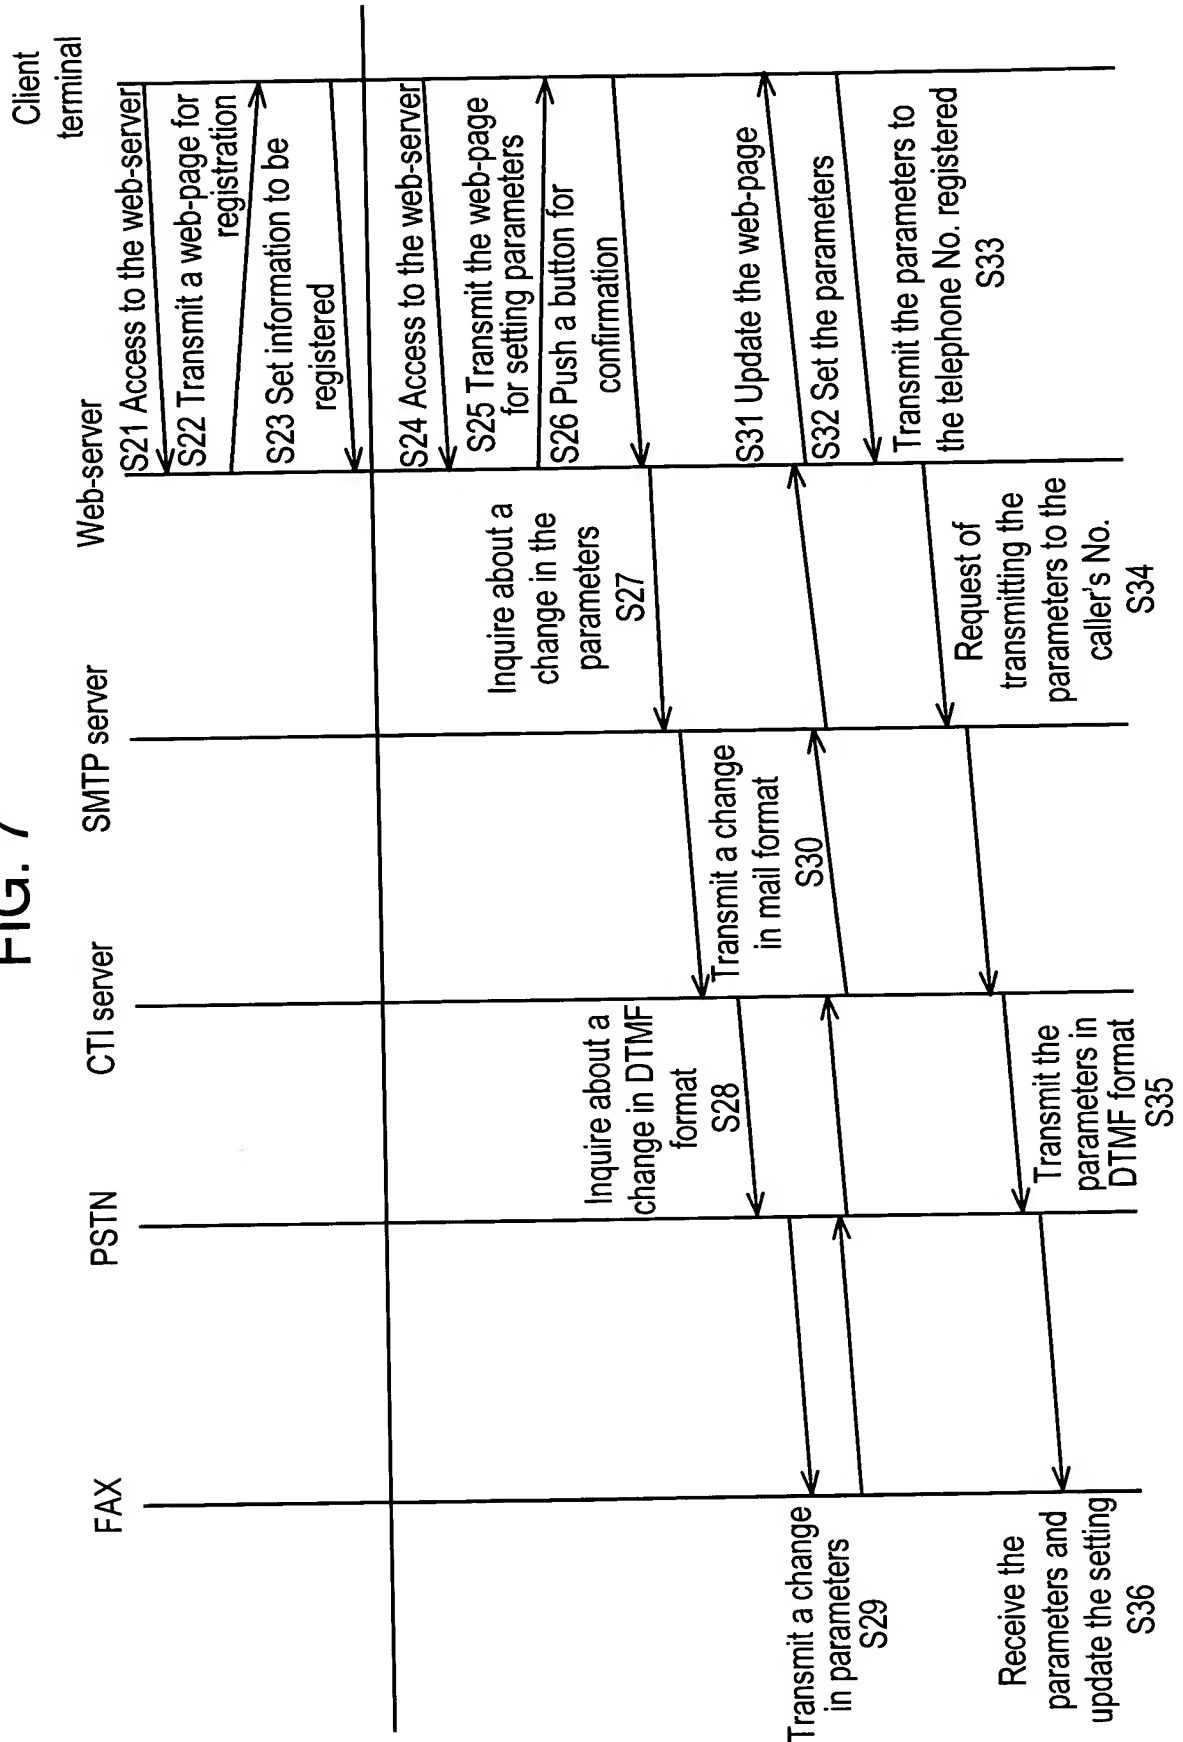


FIG. 8

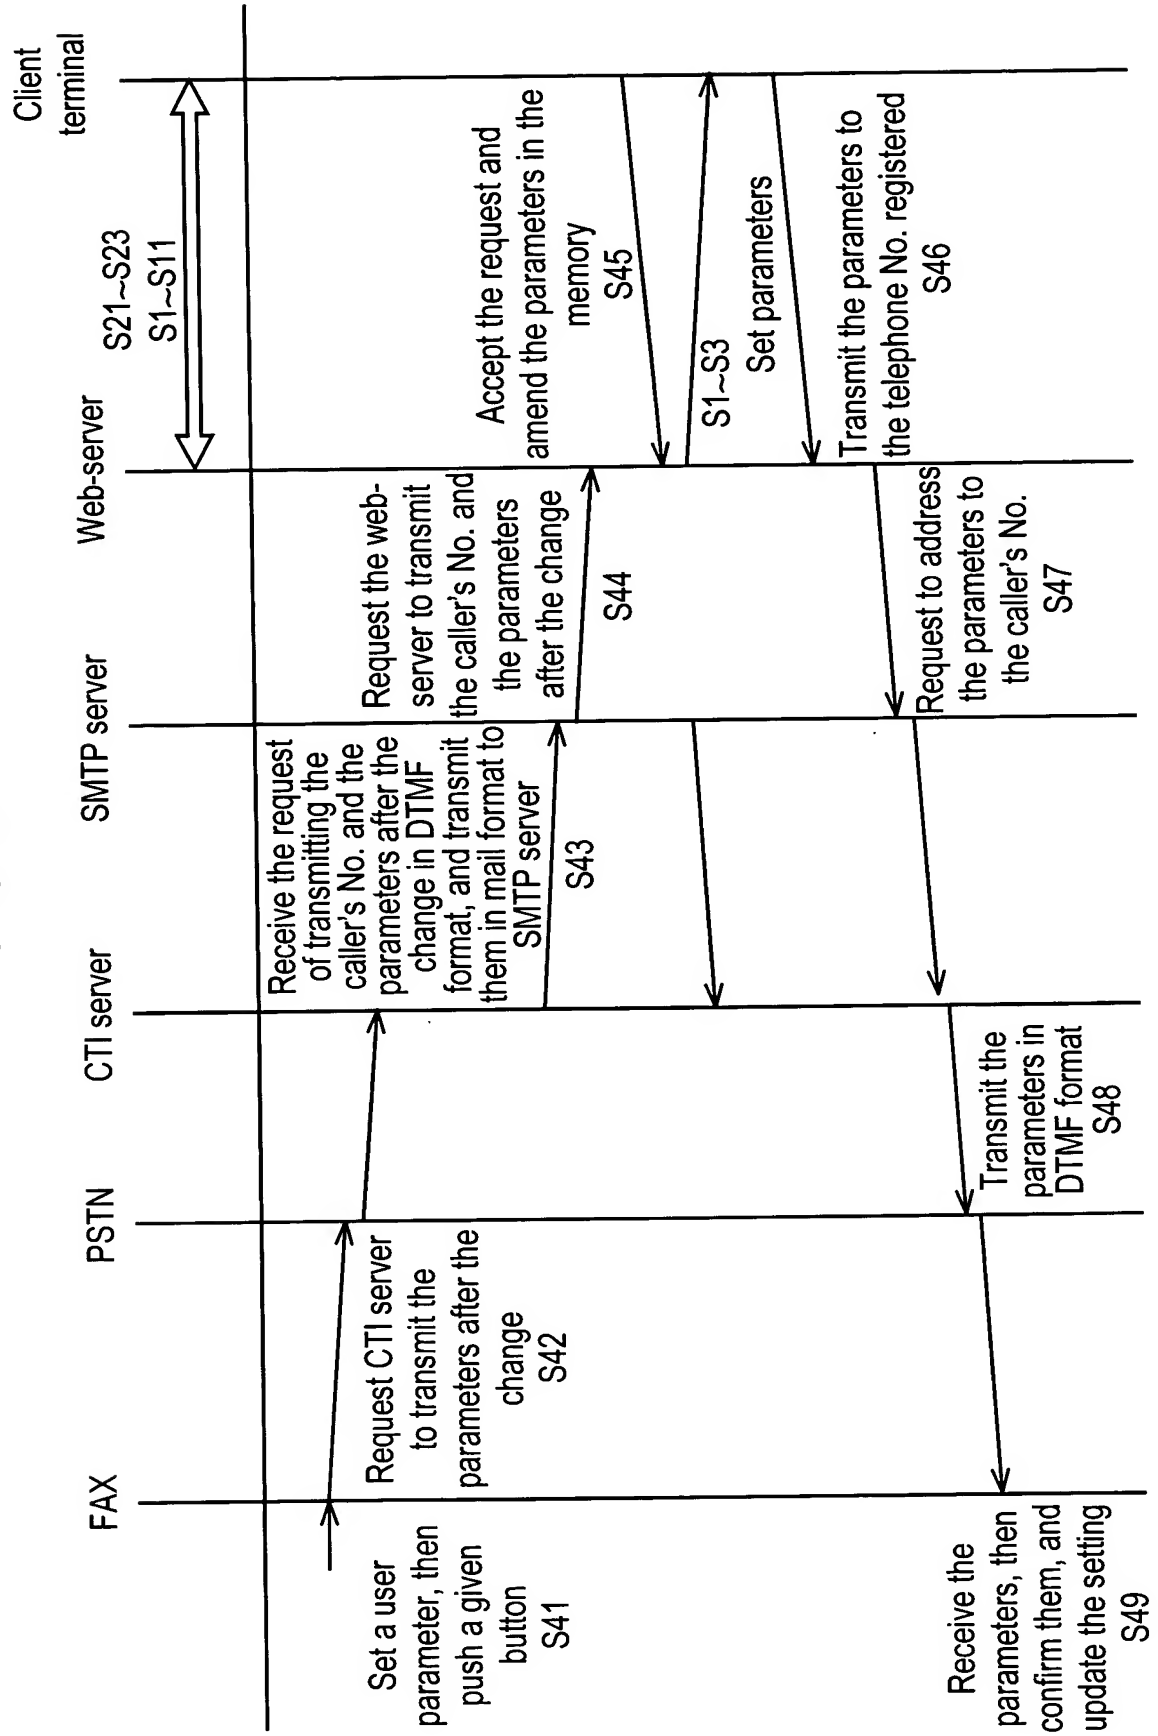


FIG. 9

Name	Parameters set by user
Model Name.	FAX-HG1
Telephone No.	000-△△△△
Type of telephone line	push
Pass word	12345
Single-button dialing 1	△×O-1234
Single-button dialing 2	△×O-2345
Single-button dialing 3	△×O-3456
Single-button dialing 4	△×O-4567
Numbers of ringing before reaching answer-phone	4
Call-redirection	available / △△△-3333
Displaying a telephone No.	available
Caller ID blocking	YES
Ringer tone	melody 1
Silent arrival (FAX)	YES
Phone directory 1	Tom/XYZ – 1111
Phone directory 2	Ted/XYZ – 1112
Phone directory 3	Liz/XYZ – 1113
Phone directory 4	Bob/XYZ – 1114

FIG. 10

No 1. Print Your Name

Your name can be printed automatically on a FAX copy received by your partner.

☐ Yes, print.

☐ No, don't print.

.....

No. 5 single-button dialing

Press the key of single-button dialing, then the machine automatically calls a number registered. Input the numbers you want to register.

Single-button dialing 1

Single-button dialing 2